

Leica Rugby 820/830


Quick Start




Version 1.0

- when it has to be **right**


Leica
Geosystems




H.I. ALERT




Battery (Li-Ion)




Battery (Alkaline)





Rugby 820 + Rod Eye 180, Digital RF

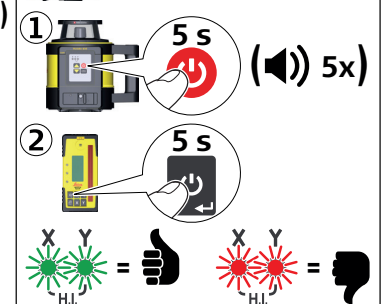

Li-Ion

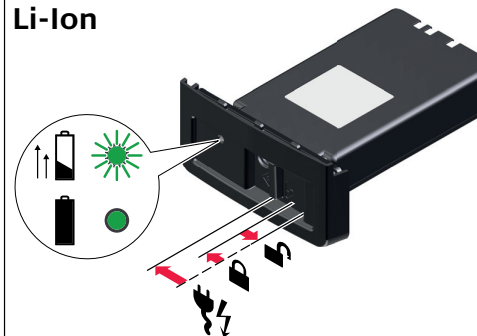

Alkaline 4x D-cell (LR20)

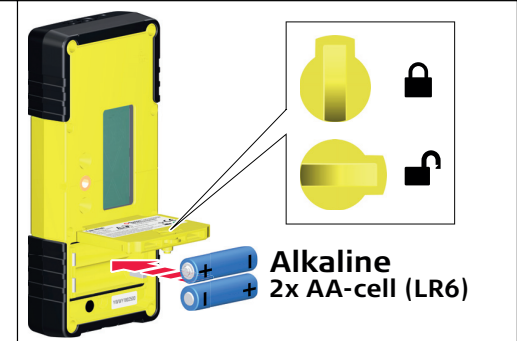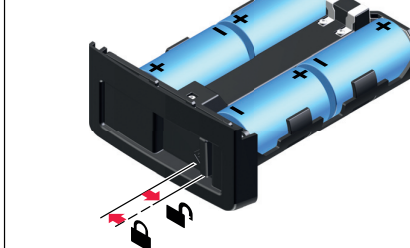

%/		
1x		
2x		
3x		

Rod Eye 160, Digital



%I




±0.5 mm, ±1 mm,
±2 mm, ±3 mm, ±5 mm



1x

mm 022 ←

Setting Forms

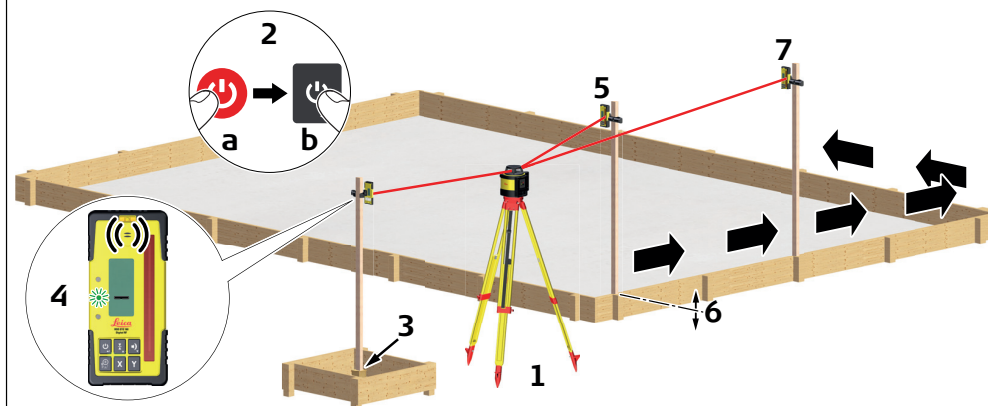

Rugby 820 + Rod Eye 180, Digital RF



%I



±0.5 mm, ±1 mm,
±2 mm, ±3 mm, ±5 mm




1x

mm 022 ←



1.5 s

Smart Target




SMT ▶ XSC




5 s

Smart Target Lock




SML ▶ XSL ▶ LOC


Checking Grades

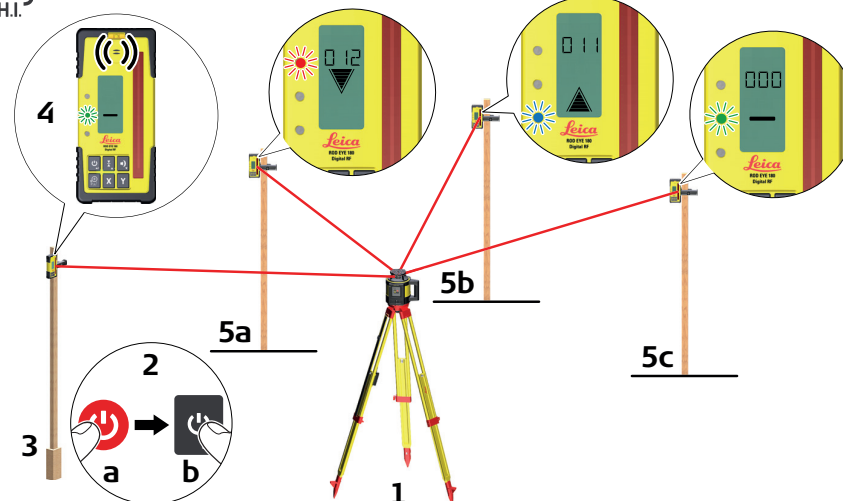


Manual Grading

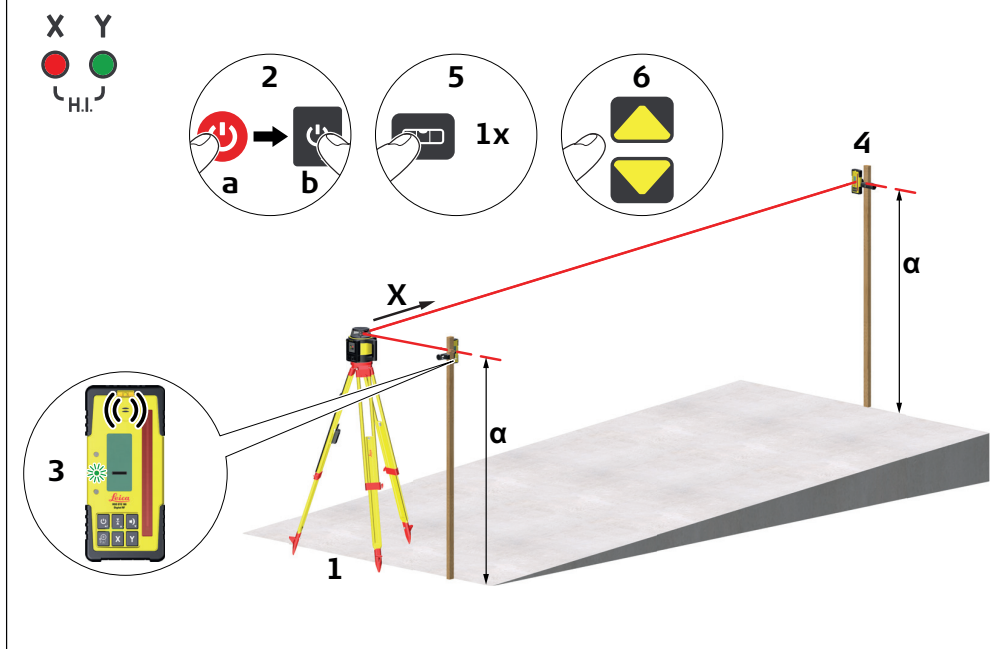

Smart Target Lock, Rugby 820 + Rod Eye 180 Digital RF

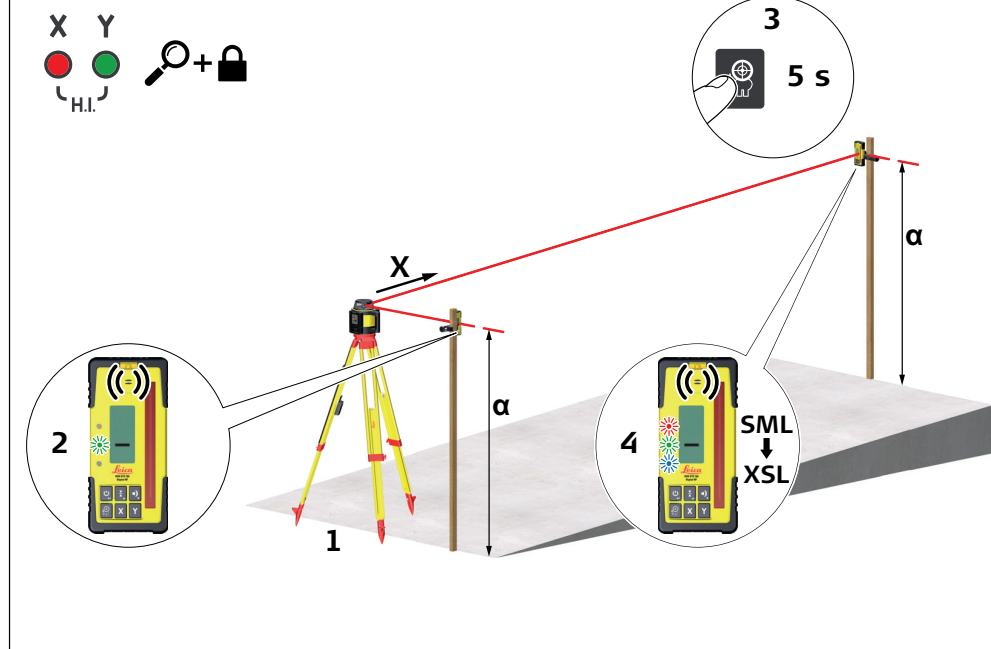

Smart Target, Rugby 820 + Rod Eye 180 Digital RF

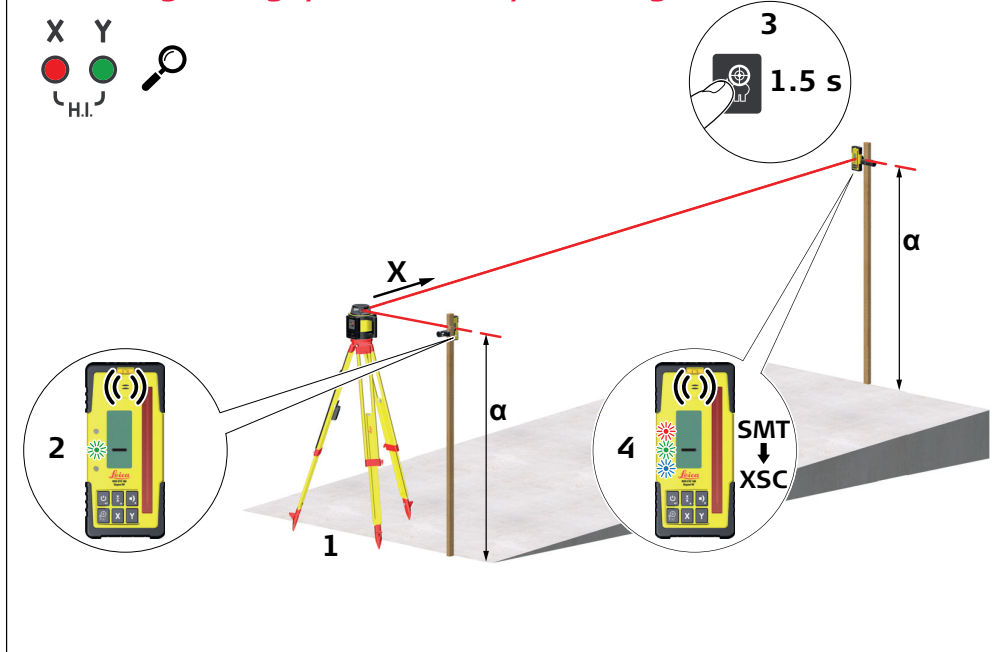

Laser class 2 product in
accordance with
IEC 60825-1

Leica Geosystems AG
Heinrich-Wild-Strasse
CH-9435 Heerbrugg
Switzerland
Phone +41 71 727 31 31
www.leica-geosystems.com

- when it has to be **right**

Leica
Geosystems

804571-1.0.0
Original text
© 2013 Leica Geosystems AG, Heerbrugg, Switzerland