

# EASY ACCESS CO. LADDERS/WORK PLATFORMS, TRESTLES & PLANKS





# LADDERS

For compliant use on a trade site, the minimum recommended weight rating for a ladder is 150kg, and the ladder must display an "Industrial" label. Easy Access Trade Series aluminium and fibreglass trade ladders are 150kg rated, and include an extensive range of ladder types to suit the job.

For a more robust ladder choice, the New Zealand-made Warthog range is rated to 180Kg and are sold with a 10 year warranty.

For household use and light industrial tasks, we have a handy domestic 120Kg rated ladder range.





# ONSITE LADDER USE FAQs AND REGULATORY SAFETY GUIDELINES

#### INDUSTRIAL LABEL FOR TRADE SITES

Ladders must have an "Industrial" label to be compliant for trade sites. A minimum weight rating of 150kg is recommended for trade.

#### SAFE ANGLE OF SLOPE

The ratio of height to horizontal distance out from the vertical support surface of any single pole or extension ladder is from 1:4 to 1:6.

#### LADDER USE DURATION

Ladders are to be used only for tasks of short duration which would normally be less than 10 minutes.

#### PLATFORM LADDERS ARE PREFERABLE

Platform ladders are recommended for tasks more than 5 mins because they provide 3 points of contact, a stable working platform and a handrail.

#### LADDERS ON TRADE SITES


Platform ladders are the only ladder type permissible on many worksites.

#### FOLD-OUT STEP/EXTENSION LADDERS

Look for trapezoidal steps on dual purpose ladders for a comfortable step in both step and single ladder positions.

#### LADDER COMPLIANCE

The standard of compliance for portable ladders is AS/NZS 1892.

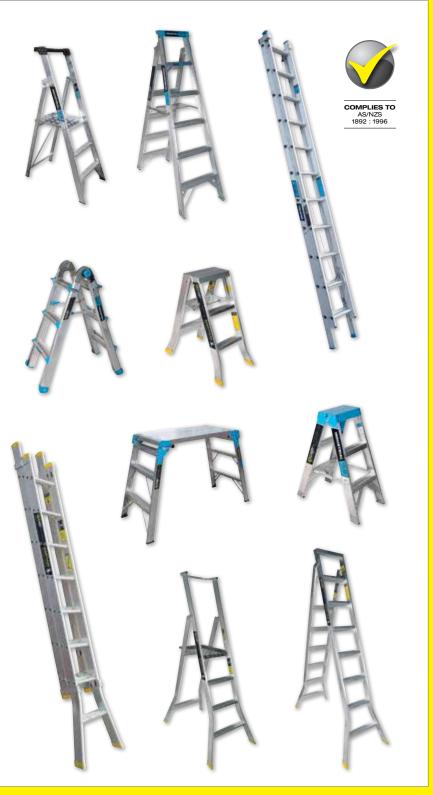

NB. Worksite requirements may vary, and may be more stringent than the legal requirement.



# LADDERS



# **150KG RATED DOUBLE SIDED STEP LADDER**

- Heavy duty ladder feet the highest-wearing part of a ladder
- Non-clogging hinge won't jam up with plaster spills
- Stainless steel rivets with extra large heads for maximum durability
- Internal side stay prevents damage during transport



co **LOAD** RATING

COMPLIES TO
AS/NZS
1892 : 1996

Code	Barcode	Description	Length	Stance Width	Load Rating	Weight
OXDS02	9341231026126	2 Step	0.6m	0.39m	150Kg	6.0Kg
OXDS03	9341231013188	3 Step	0.9m	0.42m	150Kg	7.1Kg
OXDS04	9341231013195	4 Step	1.2m	0.46m	150Kg	8.1Kg
охвон		Optional bolt on Handrail				







# **150KG RATED FIBREGLASS DOUBLE** SIDED STEP LADDER

• High strength fiberglass stiles - Electrically safe and non-conductive

9341231026492

9341231026508

9341231026515

9341231026522

 Large brace members - maximum rigidity



OXDSF03

OXDSF04

OXDSF06

OXDSF08

LOAD RATING

0.42m

0.46m

0.54m

0.62m

COMPLIES TO AS/NZS 1892 : 1996

7.0Kg

8.8Kg

11.0Ka

13.0Kg

150Kg

150Kg

150Ka

150Ka



# **180KG RATED WARTHOG DOUBLE SIDED** WELDED STEP LADDER

0.9m

1.2m

1.8m

2 4m

#### FULLY WELDED STEPS - HIGH STRENGTH **& SUPERIOR RIGIDITY**

3 Step

4 Step

6 Step

8 Step

- Compact and lightweight but seriously tough
- · Smooth locking mechanism that automatically engages when opened
- Non clogging hinge opens up to allow dirt and plaster to fall away
- Box section stile and step more robust and rigid



Code	Barcode	Description	Length	Stance Width	Load Rating	Weight
WHDS03	9421901086107	3 Step	0.9m	0.49m	180Kg	7.3Kg
WHDS04	9421901086114	4 Step	1.2m	0.66m	180Kg	9.9Kg
WHDS06	9421901086138	6 Step	1.8m	0.66m	180Kg	13.6Kg
WHDS07	9341231007415	7 Step	2.1m	0.66m	180Kg	14.2Kg

\* Extra height models available on request as a special order



LOAD RATING

COMPLIES TO

AS/NZS 1892 : 1996



MADE IN NEW ZEALAND ISO9001

EEPHONE 0800 394 222 sales@easyaccess.co.nz www.easyaccess.co.nz

# 180KG RATED WARTHOG WIDE DOUBLE SIDED WELDED LADDER

- 800mm wide step provides a large surface
- Much safer and easier than the old saw horse
- Smooth automatic locking mechanism
- Non clogging top step hinges
- Hollow box section stile and steps for extra strength and rigidity





Code	Barcode	Description	Length	Load Rating	Weight		
WHDS02-800	9421901768843	2 Step	0.6m	180Kg	10.0Kg	A R	10 YEAR
WHDS03-800	9341231086909	3 Step	0.9m	180Kg	11.0Kg	R	WARRANTY
WHDS04-800	9341231086916	4 Step	1.2m	180Kg	12.0Kg		

# **150KG RATED DUAL PURPOSE LADDER**

- Hard-wearing feet the highest wearing part of a ladder
- Internally braced side arms improves stability and doubles as a handy tool tray
- Trapezoidal back steps comfortable to use in either 'A' shape or folded out into a single ladder configuration
- Stainless steel rivets with extra large heads for maximum durability
- Secure locking latch guards against accidental dislodgement





COMPLIES TO AS/NZS 1892 : 1996

Code	Barcode	Description	Length	Stance Width	Load Rating	Weight
OXSE06	9341231026256	6 Step	1.8m - 3.3m	0.55m	150Kg	11.0Kg
OXSE07	9341231026263	7 Step	2.1m - 3.9m	0.60m	150Kg	12.0Kg
OXSE08	9341231026270	8 Step	2.4m - 4.5m	0.63m	150Kg	13.0Kg



# LADDERS

## **150KG RATED FIBREGLASS DUAL PURPOSE LADDER**

#### **STEP LADDER / EXTENSION LADDER**

- Hard-wearing feet the highest wearing part of a ladder
- Internally braced side stay arms much more stable
- Trapezoidal back steps comfortable to use in the 'A' shape or folded out
- Stainless steel rivets with extra large heads for maximum durability
- Secure locking latch guards against accidental dislodgement
- Fibreglass Electrically safe and non-conductive

EXTRA LARGE RIVET HEADS FOR MAXIMUM DURABILITY

SIDE STAY COMBINES A HANDY TOOL TRAY WITH EXCELLENT RIGIDITY

TRAPEZOIDAL BACK STEPS - COMFORTABLE TO USE IN EITHER 'A' SHAPE OR FOLDED OUT

> HARD-WEARING FEET - THE HIGHEST WEARING PART OF A LADDER

LOAD RATING

8



NON CONDUCTIVE FIBREGLASS STILES MAKE IT ELECTRICITY SAFE

Code	Barcode	Description	Length	Stance Width	Load Rating	Weight
OXDPF06	9341231026553	6 Step	1.8m - 3.2m	0.55m	150Kg	12.9Kg
OXDPF07	9341231026560	7 Step	2.1m - 3.9m	0.60m	150Kg	14.7Kg
OXDPF08	9341231026577	8 Step	2.4m - 4.5m	0.63m	150Kg	16.9Kg

# **FREEPHONE 0800 394 222**

sales@easyaccess.co.nz www.easyaccess.co.nz

SECURE LOCKING LATCH - GUARDS AGAINST ACCIDENTAL DISLODGEMENT

# **180KG DUAL PURPOSE WARTHOG WELDED LADDER**

#### FULLY WELDED - THE STRONGEST LADDER FOR THE SERIOUS TRADESMAN

- Dual purpose, fold out ladder
- No protruding hooks or snag points to catch on roof racks and get damaged
- All rungs line up to form a large flat step when folded
- Same size rungs right to the top
- Will not twist exceptional torsional strength

BOX SECTION STILES ALMOST DOUBLE THE TORSIONAL TWIST STRENGTH OF C-SHAPED CHANNEL SECTIONS - NO NEED FOR GUSSET BRACING

WELDED TRAPEZOIDAL STEPS. THESE WILL NEVER LOOSEN WITH WEAR AND TEAR AS SWAGED OR RIVETED STEPS DO OVER TIME. THIS FEATURE PROMISES THE OPERATOR YEARS OF RELIABLE AND SAFE USE





AS/NZS 1892 : 1996 RATING

MADE IN NEW ZEALAND ISO9001

Code	Barcode	Description	Length	Stance Width	Load Rating	Weight
WHSE04	9421901086091	4 Step	1.2m - 2.1m	660mm	180Kg	8.0Kg
WHSE05	9421901086039	5 Step	1.5m - 2.7m	660mm	180Kg	9.0Kg
WHSE06	9421901086046	6 Step	1.8m - 3.3m	660mm	180Kg	10.0Kg
WHSE07	9421901086053	7 Step	2.1m - 3.9m	660mm	180Kg	11.0Kg
WHSE08	9421901086060	8 Step	2.4m - 4.5m	660mm	180Kg	12.0Kg
WHSE09	9421901086077	9 Step	2.7m - 5.4m	825mm	150Kg	13.0Kg
WHSE10	9421901086084	10 Step	3.0m - 5.7m	825mm	150Kg	14.0Kg





9

**IDEAL FOR TRADE** 

USE LOAD RATED AT 180KG

# 150KG RATED TRADE SERIES PLATFORM LADDER

- Large non-slip platform surface for added safety when working at heights
- Simply folds out giving a well braced platform and folds flat for storage
- Wide, trapezoidal box step for high torsional strength
- Plastic molded handrail doubles as a handy tool tray
- Robust leg bracing for added strength and stability
- Central stay arm under platform no pinch points
- Push rod system allows easy-fold on larger models

Code	Barcode	Description	Height*	Stance Width	Overall Stile Length	Load Rating	Weight
OXPL02	9341231026317	2 Step	0.56m	0.54m	1.6m	150Kg	6.0Kg
OXPL03	9341231026324	3 Step	0.85m	0.59m	1.9m	150Kg	7.0Kg
OXPL04	9341231026331	4 Step	1.13m	0.63m	2.2m	150Kg	8.0Kg
OXPL05	9341231026348	5 Step	1.41m	0.67m	2.5m	150Kg	10.0Kg
OXPL06	9341231026355	6 Step	1.69m	0.71m	2.8m	150Kg	11.0Kg
OXPL08	9341231026379	8 Step	2.26m	0.80m	3.4m	150Kg	13.0Kg

\* Heights show dimensions from floor to top of platform

## 150KG RATED FIBREGLASS PLATFORM LADDER

- Large anti-skid work platform with raised edges - keeps feet inside the platform for greater safety and comfort
- Braced platform and folds flat for storage
- Welded back leg bracing much greater rigidity, safety, durability
- Optional bolt on handrail and gate full surround safety
- Fibreglass Electrically safe and non-conductive

Code	Barcode	Description	Height*	Stance Width	Overall Stile Length	Load Rating	Weight
OXPLF02	9341231029868	2 Step	0.56m	0.54m	1.6m	150Kg	10.4Kg
OXPLF03	9341231026614	3 Step	0.85m	0.59m	1.9m	150Kg	12.0Kg
OXPLF04	9341231026621	4 Step	1.13m	0.63m	2.2m	150Kg	14.7Kg
OXPLF06	9341231026645	6 Step	1.69m	0.71m	2.8m	150Kg	18.2Kg
OXPLF08	9421901768232	8 Step	2.26m	0.80m	3.4m	150Kg	20.2Kg

EEPHONE 0800 394 222

\* Heights show dimensions from floor to top of platform



COMPLIES TO AS/NZS 1892 : 1996

LOAD RATING

> PLATFORM LADDERS ARE RECOMMENDED AS THE SAFEST LADDER OPTION!



LOAD RATING



COMPLIES TO AS/NZS 1892 : 1996



FR

sales@easyaccess.co.nz www.easyaccess.co.nz

# FULL SURROUND HANDRAIL FOR TRADE SERIES PLATFORM LADDERS

#### **FEATURES & BENEFITS**

- Safer for longer duration use
- Click-in locking mechanism for ease of use
- Slides up when not in use for flat folding of the ladder and handrail

# **OPTIONAL TOOL BUCKET**

#### **FEATURES & BENEFITS**

- For more storage capacity, use a clip-on tool bucket
- Reduces time-consuming descending and re-climbing to fetch tools and equipment.

# PLATFORM LADDER WHEELS

#### **FEATURES & BENEFITS**

- Optional spring loaded wheels attached to the base to improve the mobility of the ladder
- Spring mechanism disengages wheels when ladder in use

#### **KEY COMPONENTS**


Code	Description
Α	Cross Bracing
В	Anti-Slip Deck
С	Molded Rubber Feet
D	Trapezoidal Box Step For Torsional Strength
Е	Central Stay Arm
F	Safety Guardrail with Molded Tool Tray
G	Push Rod Easy Fold System
н	Robust Leg Bracing
I.	Optional Full Surround Locking Handrail
J	Optional Clip-on Tool Bucket
к	Optional Spring Loaded Wheel



LOAD RATING COMPLIES TO AS/NZS 1892 : 1996



n



Description

Full surround handrail

Clip-on tool bucket

Code

OXPLFSH

OXPLTT





LADDERS

## **180KG RATED WARTHOG WELDED** PLATFORM LADDER

#### THE SAFEST CHOICE

- Large work platform much safer and more user friendly when working for longer periods or handling bulky items
- One piece, smooth operation simply folds out and locks
- Folds flat for storage
- Optional spring loaded wheels attach to the base to improve the mobility of the ladder
- Optional full surround handrail, with or without additional handrail on each stile - enhanced operator safety
- Centrally mounted stay arm no more pinch points





1892 : 1996

LOAD RATING

COMPLIES TO AS/NZS MADE IN NEW ZEALAND ISO9001

Code	Barcode	Description	Height*	Overall Stile Length	Load Rating	Weight
WHPL02	9341231007552	2 Step	0.56m	1.7m	180Kg	9.4Kg
WHPL03	9421901086527	3 Step	0.85m	2.0m	180Kg	11.0Kg
WHPL04	9421901086534	4 Step	1.13m	2.3m	180Kg	12.2Kg
WHPL05	9421901086541	5 Step	1.41m	2.6m	180Kg	14.1Kg
WHPL06	9421901086558	6 Step	1.69m	2.9m	180Kg	15.7Kg
WHPL07	9421901086565	7 Step	1.97m	3.2m	180Kg	17.8Kg
WHPL08	9421901086572	8 Step	2.26m	3.5m	180Kg	20.0Kg
WHPL09	9341231007569	9 Step	2.54m	3.8m	150Kg*	21.0Kg
WHPL10	9341231007576	10 Step	2.82m	4.1m	150Kg*	22.8Kg

\* Black support strap needed \* Heights show dimensions from floor to top of platform

# EEPHONE 0800 394 222 sales@easyaccess.co.nz www.easyaccess.co.nz







13

LADDERS

# LADDERS

# TRADE SERIES TELESCOPIC PLATFORM LADDER


#### **FEATURES & BENEFITS**

- Height adjustable for working off a large safe platform at 4 variable heights
- Platform heights adjustable from 4-step (1.2m) to 7-step (2.0m) in seconds
- Set front and back stiles to varying heights for working on steps or uneven ground
- Handrail allows for 3 points of contact
- Large rubber feet for stable grip and hard wearing
- Rated to 150kg for industrial applications
- One-piece, smooth operation simply folds flat and locks
- Can be fitted with accessories tool bucket and full surround handrail



#### **KEY COMPONENTS**

Code	Description
Α	Anti-Slip Deck
В	Molded Rubber Feet
С	Trapezoidal Box Step For Torsional Strength
D	Central Stay Arm
E	Safety Guardrail with Molded Tool Tray
F	Front and back legs adjust individually for use on uneven surfaces
G	Large Locking Pins for easy height adjustment
н	Optional Full Surround Locking Handrail
I	Optional Clip-on Tool Bucket

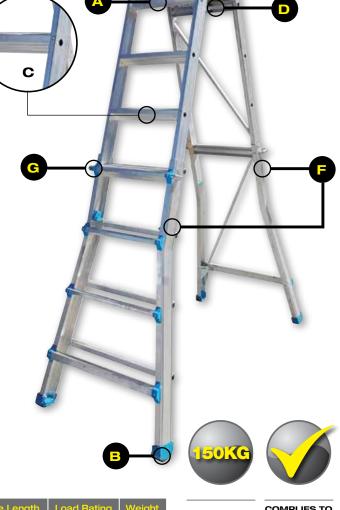

Code	Barcode	Description	Height	Overall Stile Length	Load Rating	Weight	LOAD	COMPLIES TO
OXTPL04-07	9421901464325	4 - 7 Step	1.15m - 2.02m	2.27m - 3.14m	150kg	21.1Kg	RATING	AS/NZS 1892 : 1996

# FREEPHONE 0800 394 222

sales@easyaccess.co.nz www.easyaccess.co.nz

## FULL SURROUND HANDRAIL FOR TRADE SERIES PLATFORM LADDERS

#### **FEATURES & BENEFITS**

- Safer for longer duration use
- Click-in locking mechanism for ease of use
- Slides up when not in use for flat folding of the ladder and handrail

# **OPTIONAL TOOL BUCKET**

#### **FEATURES & BENEFITS**

- For more storage capacity, use a clip-on tool bucket
- Reduces time-consuming descending and re-climbing to fetch tools and equipment.

Code	Description
OXPLFSH	Full surround handrail
OXPLTT	Clip-on tool bucket





**4 STEP** 1.2M PLATFORM HEIGHT 5-STEP 1.4M PLATFORM HEIGHT 6-STEP 1.7M PLATFORM HEIGHT 7-STEP 2.0M PLATFORM HEIGHT



## **135KG-150KG TRADE SERIES EXTENSION LADDER**

#### SINGLE ROPE OPERATION - LEAVES ONE HAND FREE TO SUPPORT THE LADDER WHILE IT IS ADJUSTED

- Side mounted rope avoids tripping hazard
- Triple pulley three times easier to lift
- Auto engaging height lock ensuring your safety
- 'D' Shape rungs for operator comfort
- Wide heavy duty feet for increased bearing surface and durability

Code	Barcode	Description	Length	Load Rating	Weight	
OXEL09	9341231026423	9 Step	2.9m - 4.7m	150Kg	13.6Kg	
OXEL11	9341231026430	11 Step	3.45m - 6.0m	150Kg	16.3Kg	
OXEL13	9341231026447	13 Step	4.1m - 7.2m	135Kg	18.7Kg	




#### FEATURES AND BENEFITS

- Adjustable to up to 175mm variance
- Wide heavy duty feet for increased bearing surface and durability
- Simple to adjust with downward foot-force applied, till ladder foot reaches lower level
- · Heavy duty stainless cable for long life



AS/NZS 1892 : 1996

Code	Barcode	Description	Height	Load Rating	Weight
OXEL09LFT	9421901768904	9 Step	3.19m - 4.72m	150Kg	15.0Kg
OXEL11LFT	9421901768911	11 Step	3.80m - 5.93m	150Kg	18.0Kg
OXEL13LFT	9421901768928	13 Step	4.41m - 7.15m	135Kg	21.0Kg

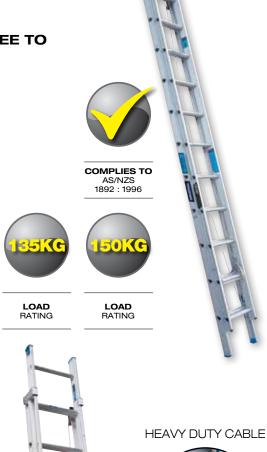







# EEPHONE 0800 394 222

WIDE HEAVY DUTY FEET

sales@easyaccess.co.nz www.easyaccess.co.nz

# 150KG RATED FIBREGLASS EXTENSION LADDER

#### SINGLE ROPE OPERATION - LEAVES ONE HAND FREE TO SUPPORT THE LADDER WHILE IT IS ADJUSTED

- Side mounted rope avoids tripping hazard
- Triple pulley three times easier to lift
- Auto engaging height lock ensuring your safety
- Heavy duty feet resists wear
- 'D' Shape rungs for comfortable standing
- Fibreglass Electrically safe and non-conductive



Code	Barcode	Description	Length	Load Rating	Weight	
OXELF09	9341231026584	9 Step	2.8m - 4.7m	150Kg	13.1Kg	
OXELF11	9341231026591	11 Step	3.5m - 6.0m	150Kg	15.6Kg	
OXELF13	9341231026607	13 Step	4.1m - 7.2m	150Kg	18.1Kg	

# 150KG WARTHOG WELDED EXTENSION LADDER

#### SAFER, MORE USER FRIENDLY AND VERY STURDY

- Large comfortable step ladder style steps right to the top
- Splayed foot for added stability
- Single, one hand rope goes through 4 pulleys giving easy one hand operation leaving the other hand free to steady ladder
- Rope mounted on inside face of stile to avoid damage
- Automatic full width height lock safe, secure and damage resistant



Code	Barcode	Length	Load Rating	Weight
WHEL08	9341231007453	2.4m - 3.6m	150Kg	14.0Kg
WHEL09	9341231007460	2.7m - 4.2m	150Kg	16.0Kg
WHEL10	9421901900007	3.0m - 4.8m	150Kg	18.0Kg
WHEL11	9421901900014	3.3m - 5.4m	150Kg	20.0Kg
WHEL12	9341231007477	3.6m - 6.0m	150Kg	22.0Kg
WHEL13	9341231007484	3.9m - 6.6m	150Kg	24.0Kg



COMPLIES TO

AS/NZS 1892 : 1996

LOAD RATING

> MADE IN NEW ZEALAND ISO9001



COMPLIES TO AS/NZS 1892 : 1996


LOAD



# **150KG RATED MULTI-PURPOSE TELESCOPIC ALL-IN-ONE LADDER**

#### **EXTENDABLE LEGS - FOR EXTRA HEIGHT ADJUSTMENT & STAIR ACCESS**

- Smart design can be used as a step or single ladder
- Easily seen hinge lock it's obvious when it's engaged
- Heavy duty feet for greater stability
- Easily operated, heavy duty height lock simple pull out and release
- All-in-One five different settings for every application
- Welded steps for superior strength and longevity

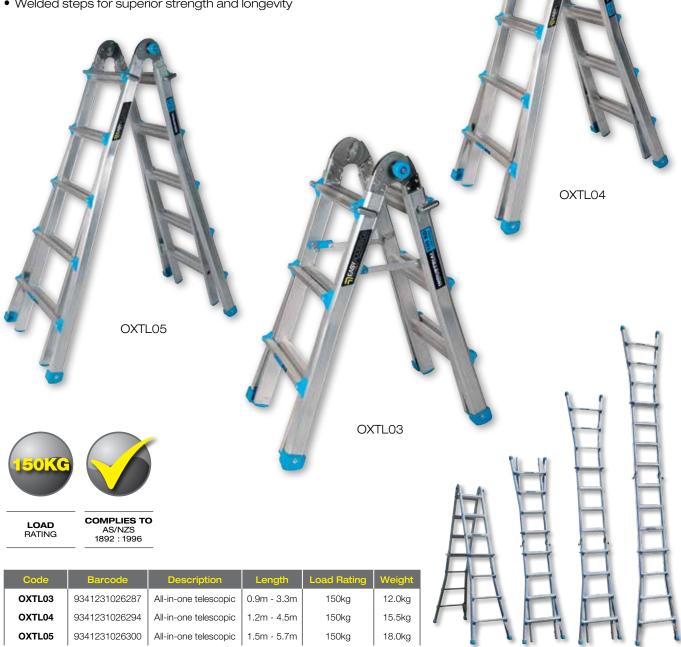

# EEPHONE 0800 394 222

sales@easyaccess.co.nz www.easyaccess.co.nz



Reach it the **easy** way

ESS (

Л

A

20.

# **150KG RATED MULTI-PURPOSE ALL-IN-ONE LADDER**





SAFELOK HEAVY DUTY HINGE



EASY PULL LOCKING PINS



HEAVY DUTY METAL BRACING

FREEPHONE 0800 394 222 sales@easyaccess.co.nz www.easyaccess.co.nz

# **150KG RATED SCAFFOLD LADDER**

- Heavy duty 150kg rated
- Comfortable 'D' shaped rung
- Good value for money



**LOAD** RATING COMPLIES TO AS/NZS 1892 : 1996

Code	Barcode	Description	Length	Load Rating
CSL3.0	9421901768805	Aluminium Straight Ladder	3.0m	150Kg
CSL3.6	9421901768812	Aluminium Straight Ladder	3.6m	150Kg
CSL4.8	9421901768829	Aluminium Straight Ladder	4.8m	150Kg
CSL5.4	9421901768836	Aluminium Straight Ladder	5.4m	150Kg



- Welded rungs for extra strength and rigidity
- D-Stiles can be attached to scaffolding using standard fittings
- Flat based rubber feet superior grip in harsh trade environments



**LOAD** RATING COMPLIES TO AS/NZS 1892 : 1996 MADE IN NEW ZEALAND ISO9001

Code	Barcode	Description	Length	Load Rating
DSL3.0	9341231007750	Welded Scaffold Ladder	3.0m	150Kg
DSL3.6	9341231007767	Welded Scaffold Ladder	3.6m	150Kg
DSL4.8	9341231007774	Welded Scaffold Ladder	4.8m	150Kg
DSL5.4	9341231007781	Welded Scaffold Ladder	5.4m	150Kg
PLC4.8	9341231007798	Putlog Coupler		

\* Only suitable with Handrail and Safety Gate Set







# LADDERS

# LIGHT INDUSTRIAL AND DOMESTIC LADDER

- Tested and certified to AS/NZS 1892 : 1996
- Huge 120kg trade load rating
- High strength, lightweight, powder coated steel construction
- Wide steps for operator safety and comfort
- Can be used in commercial applications
- Slimline; folds flat for easy storage
- Ergonomic rubber coated hand-grip for easy handling

- Large, non marking leg caps for superior stability and traction
- Strongest ladder in this class in NZ!
- Handy locking device ensures the ladder will not close accidentally
- Cost effective; all the features of a trade ladder at an affordable price!
- The must have ladder for your kitchen, workshop, warehouse, garage, office, house and garden maintenance tasks



# FREEPHONE 0800 394 222

sales@easyaccess.co.nz www.easyaccess.co.nz

# LIGHT TRADE DUAL PURPOSE LADDER 120KG

#### FEATURES AND BENEFITS

- Use in 'A' shape or extended straight ladder position
- Trapezoidal steps on both sides for a comfortable step in both positions
- Internally braced side arms improve stability and rigidity
- Secure locking latch guards against accidental dislodgement
- Lightweight for easy domestic and light trade use
- Exceptional pricing





**LOAD** RATING COMPLIES TO AS/NZS 1892 : 1996

Code	Barcode	Description	Height	Length	Load Rating	Weight
LTDP06	9421901464332	6 - 10 Step	1.71m - 3.35m	(folded): 1.82m	120kg	8.4Kg



# WORK PLATFORMS, TRESTLES & PLANKS

Aluminium and wooden planks and trestles; folding workhorses and aluminium platforms for quick and easy access to low level work.

# Safe, efficient, easy!



# **TELESCOPIC ALUMINIUM PLANK**

#### **FEATURES & BENEFITS**

#### Heavy duty expandable platform


- Simply extend and lock at desired length
- Compact for easy handling and transportation
- Lightweight and robust aluminium construction
- Slip resistant surface for safety
- Rubber end caps prevent damage
- Smooth sliding action for effortless adjustment



**LOAD** RATING **COMPLIES TO** AS 6001 : 1999



Code	Barcode	Description	Length	Width
OX-TP40	9341231008252	Telescopic Work Platform	2.23m - 4.0m	300mm





LOCKING MECHANISM TO FIX PLANK AT DESIRED LENGTH



# WORK PLATFORMS, TRESTLES & PLANKS

#### **150KG RATED ALUMINIUM "A" FRAME TRESTLES**

#### **FEATURES & BENEFITS**

- Much lighter and more user friendly than steel
- Full width to take two planks meeting safety standards
- Adjustable foot option for uneven ground
- Fully welded rung and box section stiles give great strength and durability



LOAD RATING



COMPLIES TO AS/NZS 1892 : 1996

Code	Barcode	Description	Width	Load Rating	Weight
AFT120	9341231008030	1.2m Aluminium Trestle	230mm	150Kg	7.5Kg
AFT180	9421901086879	1.8m Aluminium Trestle	230mm	150Kg	10.5Kg
AFT240	9421901086886	2.4m Aluminium Trestle	230mm	150Kg	14.5Kg
AFT300	9421901086893	3.0m Aluminium Trestle	230mm	150Kg	18.0Kg
AFT360	9341231008047	3.6m Aluminium Trestle	230mm	150Kg	22.0Kg
AFT420	9341231008054	4.2m Aluminium Trestle	230mm	150Kg	28.5Kg
AFT480	9341231008061	4.8m Aluminium Trestle	230mm	150Kg	32.0Kg
	-	- · ·			

Code	Barcode	Description
ADJ04	9341231008078	Adjustable feet (x4) - Optional

# 225KG RATED ALUMINIUM PLANK

#### **FEATURES & BENEFITS**

- Three cavity extrusion for superior rigidity
- Lightweight but high strength
- Rubber inserts prevents slipping on support tubes
- Knurled grip extrusion for added traction in damp conditions



AS/NZS 1577 : 2013



Code	Barcode	Description	Width	Load Rating	Weight
ALP3	9341231027062	3.0m	230mm	225Kg	11.0Kg
ALP4	9341231027079	4.0m	230mm	225Kg	14.0Kg
ALP5	9341231027086	5.0m	230mm	225Kg	18.0Kg
ALP6	9341231027093	6.0m	230mm	225Kg	22.0Kg

# 225KG RATED QUICKLATCH WORKHORSE

#### **FEATURES & BENEFITS**

- Folds to an easily stored saw horse takes 85% less room to store than a fixed leg version
- Simple locking legs for total safety
- Zinc coated for rust protection
- Half the weight of a wooden sawhorse
- Load capacity 225kg





Code	Barcode	Description	Height	Length	Weight
WQLL	9421901464073	Quicklatch Workhorse	700mm	900mm	6.5Kg
WQLL/2	9421901464257	Quicklatch Workhorse Set of 2	700mm	900mm	13.0Kg

# 225KG RATED QUICKLATCH WORKHORSE TRESTLE

#### **FEATURES & BENEFITS**

- Folds to an easily stored trestle takes 85% less room to store than a fixed leg version
- Simple autolocking 'quicklatch'
- Zinc coated for rust protection
- Load capacity 225kg
- Large platform for superior support



LOAD RATING

Product Code	Barcode	Description	Height	Length	Weight
WQLT	9421901464097	Quicklatch Trestle	500mm	1200mm	6.7Kg
WQLT/2	9421901464264	Quicklatch Trestle Set of 2	500mm	1200mm	13.5Kg





# WORK PLATFORMS, TRESTLES & PLANKS

# **150KG RATED FOLDING ALUMINIUM WORK PLATFORM**



Leg locking device prevents dislodgement

sales@easyaccess.co.nz www.easyaccess.co.nz

EEPHONE 0800 394 222

Locking pins lock

handrail in place

Folds flat for easy

cartage and storage

# ADJUSTABLE WORK PLATFORMS

#### **FEATURES & BENEFITS**

- 6 height settings 600mm 850mm
- Each leg independently adjustable for uneven ground
- Lightweight and folds flat for easy store
- Available with 1200mm and 850mm long platform
- Optional guardrail available
- 450mm wide platforms for safety and efficiency

INDEPENDENTLY ADJUSTABLE LEGS THROUGH 6 HEIGHT SETTINGS POSITIVE LOCKING LATCHES

**LOAD** RATING

Code	Description	Height	Length	Width	Load Rating	Weight	
ADJWP120	Folding 3 step Work platform adjustable legs	0.6m - 0.85m	1200mm	450mm	150Kg	11.8Kg	
ADJWP085	Folding 3 step Work platform adjustable legs	0.6m - 0.85m	850mm	450mm	150Kg	10.8Kg	







NEW

ADJUSTABLE TO 6 HEIGHTS

# WORK PLATFORMS, TRESTLES & PLANKS

## **150KG RATED ONE MAN PLATFORM STEPDECK**

#### **FEATURES & BENEFITS**

- Non-tip, non slip guaranteed
- Much safer than trestles, planks and ladders
- 5 seconds to setup, 3 seconds to adjust
- Folds down flat for easy transport and storage
- Complies with various worldwide safety standards including 6001, ANSI ASL - A14 : 2011
- Independent safety testing approved



TREADPLANK WITH HANDRAIL







Code	Description	Deck Size	Height	Load Rating	Weight
SK1000	Stepdeck Maximum Height 1000mm	360mm x 1080mm	500mm - 1000mm*	150Kg	12.0Kg
SK1300	Stepdeck Maximum Height 1300mm	360mm x 1080mm	500mm - 1300mm*	150Kg	15.0Kg
SKTP200	Treadplank - Spans Between Two Units	360mm x 2000mm		150Kg	3.0Kg
SKTP300	Treadplank - Spans Between Two Units	360mm x 3000mm		150Kg	4.0Kg
SKHRFI	Small Handrail			150Kg	
SKW	Stepdeck Spring Wheel for SK1300			150Kg	
SKPH	Plank Handrail			150Kg	

\* Approximate mm

# EEPHONE 0800 394 222 sales@easyaccess.co.nz www.easyaccess.co.nz

# **STABULL - THE FASTEST WORK PLATFORM ON THE PLANET!**

#### **FEATURES & BENEFITS**

- One piece, height adjustable sets up in seconds
- Large work area for industrial trade use
- Non-slip perforated platform deck guaranteed and proven safety
- · Folds down flat for easy transport & storage
- Simply select the height by sliding in the pin, walk up the integral ladder and start work
- Optional full surround handrail also folds flat for storage and transport



GATE

**SPRING** ASSISTED LIFT





NON-SLIP ACCESS LADDER

WST1000

WST1300

WST1700

45WTP

45LTP

PHR24

PHR30

WSTFSH10

WSTFSH17

**OPTIONAL SPRING** LOADED WHEEL

Wide Stabull Platform Max Height 1000mm

Wide Stabull Platform Max Height 1300mm

Wide Stabull Platform Max Height 1700mm

Wide 450mm X 2.4m Long Treadplank

Wide 450mm X 3.0m Long Treadplank

Handrail for 2.4 Treadplank

Handrail for 3.0 Treadplank

WST Full Surround Handrail for WST1000 WST Full Surround Handrail WST1300/1700

Stabull Spring Loaded Wheel

450mm x 1200mm

450mm x 1600mm

450mm x 1600mm

450mm x 2400mm

450mm x 3000mm

400mm - 1000mm\*

600mm - 1300mm\*

700mm - 1700mm\*



23.0Kg

25.0Kg

28.0Kg

225Kg

225Ka

225Kg

225Kg

225Kg

WST1000 SHOWN WITH FULL SURROUND HANDRAIL



COMPLIES TO AS/NZS 1576 : 2010



LOAD RATING



STW \* Approximate mm

# WORK PLATFORMS, TRESTLES & PLANKS

## **PLANK LEGS**

#### **FEATURES & BENEFITS**

- Simply clamp to any wood or alloy plank, or walkboard
- Folds up with plank for easy handling and storage
- Adjustable foot for uneven ground
- Two heights available
- Can be attached to any length plank



\* Planks sold separately

Grip-ply walkboard (APWB)



Code	Barcode	Description	Width
WPA600	9341231008337	0.6m - 0.9m	450mm Wide for Walkboard
WPA900	9341231008344	0.9m - 1.2m	450mm Wide for Walkboard
OXPLA600	9421901768997	0.6m - 0.9m	230mm Wide for Plank

# ALLOY / GRIP PLYWOOD WALKBOARD

#### **FEATURES & BENEFITS**

- Two widths available 280mm and 450mm
- Lightweight and user friendly
- Anti slip non corrosive durability
- Optional grip-ply deck

Code	Barcode	Description	Width	Length	Weight
AWB330	9421901086992	3.0m Alloy Walkboard	280mm	3.0m	13.0Kg
AWB430	9341231008085	4.0m Alloy Walkboard	280mm	4.0m	17.0Kg
AWB530	9341231008092	5.0m Alloy Walkboard	280mm	5.0m	20.0Kg
AWB345	9341231008108	3.0m Alloy Walkboard	450mm	3.0m	17.0Kg
AWB445	9341231008115	4.0m Alloy Walkboard	450mm	4.0m	22.0Kg
AWB545	9341231008122	5.0m Alloy Walkboard	450mm	5.0m	27.5Kg

Code	Barcode	Description	Width	Length	Weight	
APWB323	9421901086992	3.0m Grip-Ply Walkboard	280mm	3.0m	13.0Kg	
APWB423	9341231008139	4.0m Grip-Ply Walkboard	280mm	4.0m	17.0Kg	
APWB523	9341231008146	5.0m Grip-Ply Walkboard	280mm	5.0m	20.0Kg	
APWB345	9341231008153	3.0m Grip-Ply Walkboard	450mm	3.0m	17.0Kg	
APWB445	9341231008160	4.0m Grip-Ply Walkboard	450mm	4.0m	22.0Kg	
APWB545	9341231008177	5.0m Grip-Ply Walkboard	450mm	5.0m	27.5Kg	

Alloy walkboard (AWB)



# **FREEPHONE 0800 394 222**

sales@easyaccess.co.nz www.easyaccess.co.nz

# 225KG RATED ALLOY / GRIP PLYWOOD FOLDING WALKBOARD

#### **FEATURES & BENEFITS**

- Folds up for easy storage and transport
- 225kg safe working load
- Two widths available 280mm and 450mm
- Lightweight and corrosion resistant
- Anti-Slip perforated deck for excellent traction in wet conditions
- Optional grip-ply deck

Folding walkboard (FWB)

#### Folding grip-ply walkboard (APWB)

Code	Barcode	Description	Width	Length	Folded Length	Weight
FWB323	9341231008184	3m Folding Walkboard	0.28m	3.0m	1.5m	13.0Kg
FWB423	9341231008191	4m Folding Walkboard	0.28m	4.0m	2.0m	17.0Kg
FWB523	9341231008207	5m Folding Walkboard	0.28m	5.0m	2.5m	20.0Kg
FWB345	9341231008214	3m Folding Walkboard	0.45m	3.0m	1.5m	17.0Kg
FWB445	9341231008221	4m Folding Walkboard	0.45m	4.0m	2.0m	22.0Kg
FWB545	9341231008238	5m Folding Walkboard	0.45m	5.0m	2.5m	27.5Kg

Code	Barcode	Description	Width	Length	Folded Length	Weight
AFWB323	9341231008245	3m Folding Grip-Ply Walkboard	0.28m	3.0m	1.5m	13.0Kg
AFWB423	9341231008252	4m Folding Grip-Ply Walkboard	0.28m	4.0m	2.0m	17.0Kg
AFWB523	9341231008269	5m Folding Grip-Ply Walkboard	0.28m	5.0m	2.5m	20.0Kg
AFWB345	9341231008276	3m Folding Grip-Ply Walkboard	0.45m	3.0m	1.5m	17.0Kg
AFWB445	9341231008283	4m Folding Grip-Ply Walkboard	0.45m	4.0m	2.0m	22.0Kg
AFWB545	9341231008290	5m Folding Grip-Ply Walkboard	0.45m	5.0m	2.5m	27.5Kg

# LVL SCAFFOLD PLANKS AND SOLEBOARDS

MADE FROM NZ PINE

Code	Description	Width	Length
PLW470	Laminated Scaffold Plank	225mm	3.0m
PLW0.5	Soleboard	225mm	0.5m



COMPLIES TO AS/NZS 1577 : 2013



LOAD RATING













Easy Access is the premier supplier of height access solutions, enabling safe and efficient work practices worldwide









